

# PATENT SPECIFICATION (11)

1599 659

1599 659

- (21) Application No. 38352/77 (22) Filed 14 Sept. 1977 (19)  
41810/77 7 Oct. 1977  
(23) Complete Specification filed 25 May 1978  
(44) Complete Specification published 7 Oct. 1981  
(51) INT. CL.<sup>2</sup> B24B 13/02  
(52) Index at acceptance  
B3D 2G2 2G3E 2G3G 2G4  
(72) Inventor STEPHEN JACK WYLDE



## (54) A PAD FOR FRICTIONALLY GRIPPING LAPPING FOILS AND POLISHING PADS DURING THE GRINDING, LAPPING OR POLISHING OF OPTICAL LENSES

(71) We, J. & S. WYLDE LIMITED, a British Company, of 109 Stafford Road, Croydon, Surrey, CR9 4BG, do hereby declare the invention, for which we pray that a patent may be granted to us, and the method by which it is to be performed, to be particularly described in and by the following statement:—

This invention relates to a pad for frictionally gripping lapping foils and polishing pads during the grinding, lapping and polishing of optical lenses made either of glass or transparent synthetic plastics material.

Optical lenses are generally ground, lapped or polished by means of a tool having a carefully machined surface which conforms to that desired on one face of an optical lens. Sometimes the same tool has two such surfaces—one for shaping one side of the lens and the other for shaping the other side of the lens, or else one for producing an approximate surface on the lens and the other for producing an accurate surface on the lens. Usually the working surface or surfaces on these tools are of convex or concave shape.

In order to reduce the rate of wear on the said working surfaces of these tools, it is usual to apply to them an adhesive-backed replaceable pad which is sufficiently thin to be brought into conformity with the convex or concave working surface of the tool. Various forms of pad have been proposed in the past, including aluminium pads, steel pads and pads made of perforated metal so that slurry can be retained in the perforations.

The present invention constitutes a departure from this practice in that a base pad is first applied to the working surface of the tool, after which a lapping foil or polishing pad is applied to the upper surface of the base pad without the use of an adhesive between the two pads.

Essentially, a base pad according to the

invention comprises a flexible carrier layer having an adhesive on one side by which the pad can be adhered to a working surface of a tool and having, on its other side, a friction-grip surface adapted to so frictionally grip the lower surface of a lapping foil or polishing pad that the use of an adhesive between the two pads is avoided.

The base pad can be made of various materials. In one form, the flexible carrier layer is "wet-or-dry" paper with a friction-grip surface composed of silicon carbide abrasive particles having a mesh size of P 600 in the European Standard of Grain Classification. In another form of base pad, the flexible carrier layer is a soft aluminium foil having a friction-grip surface composed of a layer of synthetic resin or other binder material in which are distributed small grains of a hard mineral material, the resin binder preferably being an epoxy resin while the mineral comprises grains of calcined bauxite (aluminium oxide).

In order that the base pad may conform precisely to the convex or concave working surface of a tool, it will generally have slots cut in from its peripheral edge in accordance with established practice in the lens grinding and polishing industry.

The invention also extends to an assembly comprising a grinding, lapping or polishing tool having a base pad of the construction described above adhered to its working surface, there being a lapping foil or polishing pad laid on and conforming to the upper surface of the base pad which grips the said lapping foil or polishing pad by means of friction only.

Some examples of friction-grip base pads in accordance with the invention as well as illustrations of the way in which they are used are shown in the accompanying drawings, in which:

Figure 1 is a plan view of one form of base pad;

50

55

60

65

70

75

80

85

90

Figure 2 is a plan view of a second form of base pad;

Figure 3 is an enlarged section through either one of the two pads shown in Figures 1 and 2;

Figures 4 and 5 are plan views of two further forms of base pad;

Figure 6 is a perspective view of an optical tool having a base pad of the construction shown in Figure 1 adhered to its convex working surface;

Figure 7 is a perspective view of a typical lapping foil of expanded zinc;

Figure 8 is a view of the tool and base pad shown in Figure 6 with the expanded zinc foil shown in Figure 7 laid on top of the base pad;

Figure 9 is a perspective view similar to Figure 7 of a lapping foil of soft unperforated aluminium which can likewise be laid on the upper surface of the base pad shown in Figure 6;

Figure 10 is a plan view of a plated diamond lapping foil which can also be laid on the base pad shown in Figure 6;

Figure 11 is a perspective view similar to Figure 8 showing a soft polishing pad about to be applied to the base pad shown in Figure 6; and

Figure 12 is a vertical section through a tool assembly during the actual grinding, lapping or polishing of an optical lens.

The base pad 10 shown in Figure 1 is of generally circular shape and has four equi-spaced radial slots 12 cut into it from the outer peripheral edge 14 of the pad. These slots are quite usual in lens grinding, lapping and polishing pads and assist in bringing the pad into conformity with the convex or concave working surface of a lens grinding, lapping or polishing tool.

The pad 16 shown in Figure 2 is similar to that shown in Figure 1 except that it is more elliptical in shape—which is the shape frequently favoured in the United States of America. Four equi-spaced radial slots 18 are formed in the pad, the slots entering the latter from the peripheral edge 20 of the pad.

As shown in Figure 3, each of the two pads shown in Figures 1 and 2 comprises a flexible carrier layer 22 of soft aluminium or some other soft metal. The lower surface of this layer has an adhesive layer 24 applied to it during manufacture of the pad for the purpose of attaching the pad to the working surface of the tool once a protective layer 26 of paper, synthetic plastics material or metal foil has been peeled off prior to use of the pad.

The upper face of the carrier layer 22 has a layer 28 of a synthetic resin material applied to it, the preferred resin being an epoxide resin. Embedded in this resin, which therefore acts as a binder, are grains 30 of a

mineral material such as calcined bauxite (aluminium oxide) which provide a friction-grip upper surface for the pad. As will be understood, the grains 30 are distributed in the layer 28 of resin after the latter has been applied in liquid form to the carrier layer 22. Then, when the resin sets, the grains of mineral material will be firmly held or "bound" by the resin. Preferably the grains 30 of mineral material have a size in the range of P 120 to P 60 (European Standard of Grain Classification), the best size having been found to be in the region of P 80. Besides bauxite, the grains could also be made equally well of silicone carbide.

Figures 4 and 5 show two further forms of base pad. Each of these has a flexible carrier layer of "wet-or-dry" paper with a friction-grip upper surface composed of silicon carbide abrasive particles having a mesh size of P 600 in the European Standard of Grain Classification. Like the base pads shown in Figures 1—3, the pads of Figures 4 and 5 each have an adhesive layer on their under surfaces, the adhesive layer being applied during manufacture of the pad and being protected prior to use of the pad by a layer of paper which can be peeled off.

The pad shown in Figure 4 is of circular shape, while that shown in Figure 5 is generally elliptical. Slots 12, 18 are formed in the pads as in the pads shown in Figures 1 and 2.

Figure 6 shows a typical metal tool 32 used to grind, lap or polish optical lenses. The tool is cylindrical and has an upper working surface 34 of convex shape. It is to be understood however that the tool could equally well have an upper working surface of concave shape.

Applied to the working surface 34 of the tool is a friction-grip base pad 36 of the construction shown in Figure 1, although the base pad could equally well be that shown in Figure 4. In other words, the protective layer 26 shown in Figure 3 has been peeled off the pad so that the adhesive layer 24 on the underside of the pad serves to bond the latter to the surface 34 of the tool. The slots 12 in the pad assist in bringing the latter into close conformity with the convex surface 34.

The rough upper surface of the pad 36 does not make contact with a lens directly. On the contrary, it serves to frictionally grip the lower surface of a lapping foil or polishing pad applied to it. Thus, Figure 8 shows an expanded zinc foil 38 of the construction shown in Figure 7 being applied to the upper surface of the pad 36 and about to be pressed down so that it takes up the convex contour of the pad 36 and the tool working surface 34. There is no adhesive on the under surface of the expanded zinc foil 38 as it will be gripped frictionally by the rough upper

surface of the pad 36. As will be understood, the slots 40 in the expanded zinc foil 38 permit the foil to take up the convex shape of the tool.

5 Other lapping foils can equally well be used in place of the expanded zinc foil shown in Figures 7 and 8. For example, the soft unperforated aluminium foil 42 shown in Figure 9 or the plated diamond foil 43 shown in Figure 10 can likewise be applied to the upper surface of the pad 36. As with the foil 38 shown in Figure 7, the foils 42 and 43 each have radial slots 40.

10 Figure 11 shows a soft polishing pad 44 being applied to the upper surface of the friction-grip pad 36. As with the expanded zinc foil 38 shown in Figures 7 and 8, the polishing pad 44 will be held on the tool by friction gripping alone. In other words, no adhesive is used to attach the lower surface of the polishing pad 44 to the upper surface of the friction-grip pad 36. In order to bring the pad 44 into a convex shape, it has slots 46 in the same way as the pads shown in Figures 7, 9 and 10.

15 Figure 12 is a section through the tool 32 shown in Figures 6, 8 and 11 during the actual grinding, lapping or polishing of an optical lens. As will be seen, the tool 32 has a friction-grip base pad 36 adhered to its upper convex surface 34, and there is a lapping foil or a polishing pad 48 applied to the rough upper surface of the pad 36 so as to be held frictionally by the latter. The foil or pad 48 can be any one of the three foils shown in Figures 7, 9 and 10, or the polishing pad shown in Figure 11.

20 The pad or foil is thus able to work on the concave undersurface 50 of an optical lens 52 which is removably held by a lens-holding block 54.

25 According to which form of machine is being used, the tool 32 and/or the lens-holding block 54 have such a movement imparted to them by means not shown in the drawing as to cause relative movement between the lower surface 50 of the lens and the foil or pad 48. As such grinding, lapping or polishing operations are well known in the optical industry, they will not be described further.

30 It will therefore be seen that the friction-grip base pads described above not only save wear on the working surfaces of tools to which they are applied, but they also permit lapping foils or polishing pads to be readily applied to the tool and to be easily removed once they have become worn or have begun to disintegrate. Further, the fact that such lapping foils and polishing pads can now be used without an adhesive on them means that the cost of producing them is reduced and the problem of having to remove dried-up adhesive when a lapping foil or a polishing pad is replaced no longer exists.

Where lapping is carried out using a plated diamond foil as shown in Figure 10, it has been found that, provided care is taken not to fold or tear the plated diamond foil, it will produce hundreds of good quality synthetic plastics optical lenses if the following instructions are carried out.

70 Following the lens-generating operation, the first fining uses fresh tap water flowing through a surfacing machine, and the working surface of the tool is covered with an adhesive-backed base pad of the form shown in Figures 1 or 4. This pad is used as a friction-grip interfacing over which the plated diamond foil or pad is laid before applying the lens and starting the machine to run for one minute.

80 Provided that the generating form was correct, the plated diamond foil or pad can now be lifted off the tool to a safe storage place and replaced with a different lapping foil, and the lens lapped for a further two minutes in clean running water. Finally, the lens and tool are placed in a polishing machine, and again the friction of the base pad will hold a polishing pad (see pad 44 in Figure 11) during the polishing operation.

90 The tool can then be returned to store with the friction-grip base pad still in position, ready for the next lens, and this can be used for many lenses. The invention therefore provides a labour-saving and material-saving system for producing fine quality lenses.

#### WHAT WE CLAIM IS:—

100 1. A base pad for application to the working surface of a tool for grinding, lapping or polishing optical lenses, the base pad comprising a flexible carrier layer having an adhesive on one side by which the pad can be adhered to the working surface of a tool and having, on its other side, a friction-grip surface adapted so to frictionally grip the lower surface of a grinding, lapping or polishing pad or foil that the use of an adhesive between the two pads is avoided.

2. A base pad according to claim 1, in which the flexible carrier layer is "wet-or-dry" paper.

3. A base pad according to claim 1 or claim 2, in which the friction-grip surface is composed of silicon carbide abrasive particles.

4. A base pad according to claim 1, in which the flexible carrier layer is soft aluminium foil.

5. A base pad according to any one of claims 1, 2 or 4, in which the friction-grip surface is composed of a layer of synthetic resin or other binder material in which are distributed grains of calcined bauxite or other hard mineral material.

6. A base pad according to any preceding claim having slots cut in it from its peripheral edge so that the pad may conform precisely

to working surface of a tool

7. A base pad according to claim 1 substantially as described herein with reference to Figures 1 and 3, Figures 2 and 3,  
5 Figure 4 or Figure 5 of the accompanying drawings.

8. A grinding, lapping or polishing tool having a base pad as claimed in claim 1 adhered to its working surface, there being a  
10 lapping foil or polishing pad laid on and conforming to the upper surface of the base pad which grips the said lapping foil or polishing pad by means of friction only.

9. A tool according to claim 8 having a  
15 lapping foil laid on the base pad, the lapping foil being a plated diamond lapping foil.

10. A tool according to claim 8 substantially as described herein with reference to Figure 8, Figure 11 or Figure 12 of the  
20 accompanying drawings.

**BROMHEAD & CO.,**  
Chartered Patent Agents,  
Clifford's Inn,  
Fetter Lane,  
London EC4A 1NP.

Printed for Her Majesty's Stationery Office by Burgess & Son  
(Abingdon) Ltd.—1981. Published at The Patent Office,  
25 Southampton Buildings, London, WC2A 1AY,  
from which copies may be obtained.




1599659

COMPLETE SPECIFICATION

5 SHEETS

This drawing is a reproduction of  
the Original on a reduced scale

Sheet 1

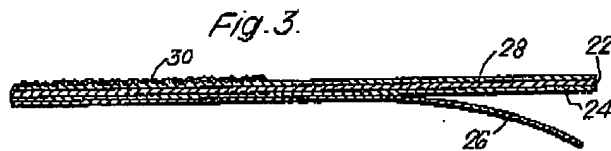
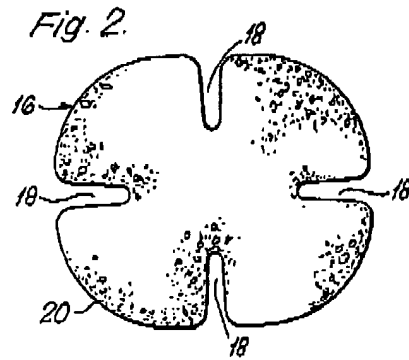
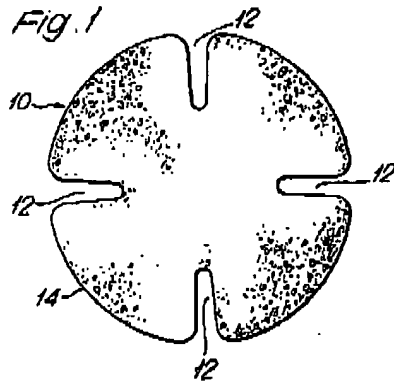


1599659

COMPLETE SPECIFICATION

5 SHEETS

This drawing is a reproduction of  
the Original on a reduced scale  
Sheet 2

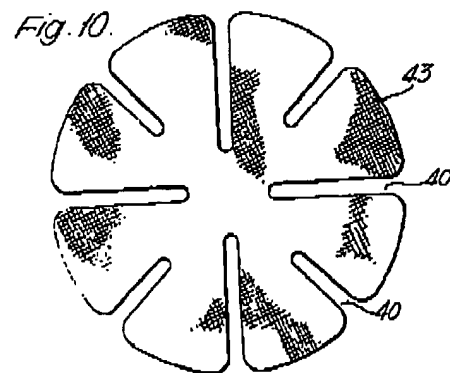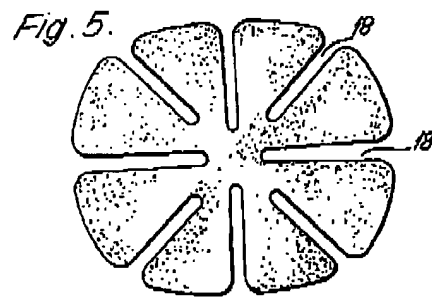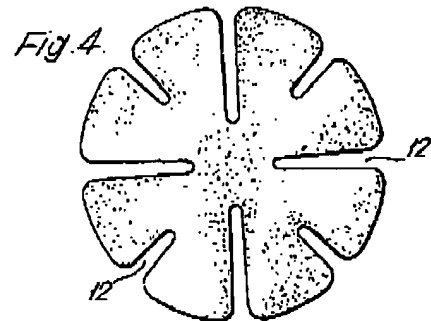

1599659


COMPLETE SPECIFICATION

5 SHEETS

This drawing is a reproduction of  
the Original on a reduced scale

Sheet 3

Fig. 6.

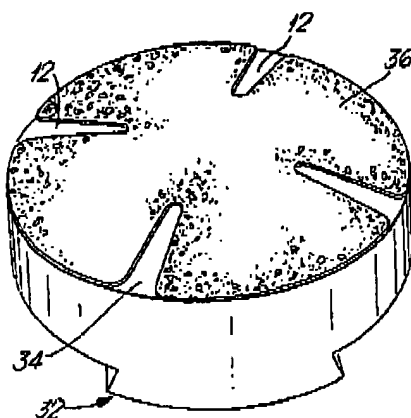

1599659  
5 SHEETS

COMPLETE SPECIFICATION  
This drawing is a reproduction of  
the Original on a reduced scale  
Sheet 4

